

SJT-CAN-232/485-V1CANRS485


PW	1	24V	CAN
	2	24V	
	3	CANH	
	4	CANL	
J232/485	1	5V	5V150mA
	2	485 DA+	RS485
	3	485 DA-	
	4		
	5		RS232
	6	232 TX	
	7	232 RX	
	8	24V	24V150mA
S1	CAN		
S2	RS485		
JC			
SZ			
AN1AN2			



1

485
9600 8

2

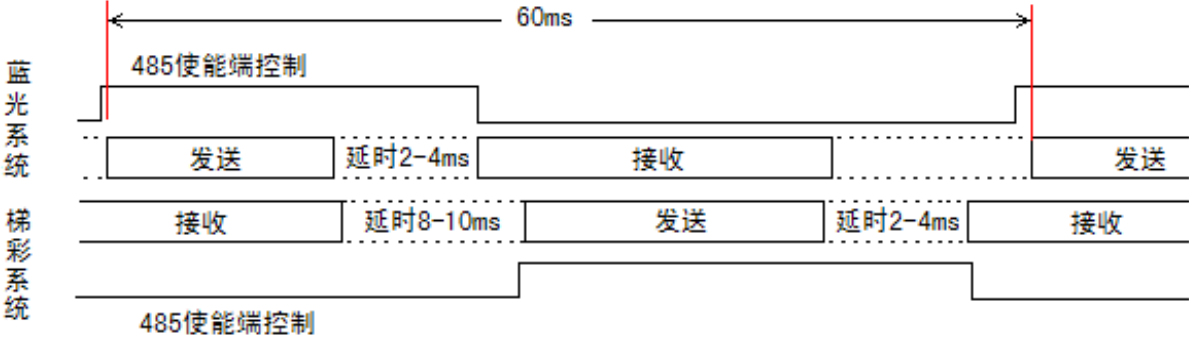

3

3.1

1 100ms “ ”

2 1 22

0xaa	0xa1/0xa2/0xa3		0/1	
------	----------------	--	-----	--

-

-

3

3Ah4FJL3Ah4FJL3YD1.34ee41.8F0

	7	6	5	4	3	2	1	0	
0	0xaa								
1	0xa1 / 0xa2				/ 0xa3				
2	8	7	6			3	2	1	
	16	15	14		12		10		

4

2

Er2		
Er3		
Er4	1 A B 2	1 A B 2
Er5		1 2 Break Feedback NO
Er6		
Er7		
Er9	KDY KDY	KDY KDY
Er10		
Er11		
Er12		
Er13		
Er14		1 2 3
Er17		1 2
Er18		
Er19		1 2
Er20		1 2 3
Er21		1 2 3 Over Time
Er22		
Er23		
Er24		
Er25		
Er26		
Er27		

Er28

3.2

“ ”

	7	6	5	4
--	---	---	---	---